

OMNETICS MICRO 360 CAT6A CONNECTOR SYSTEM

The following graphs include performance results for a 10-meter cable assembly with a plug and receptacle connector based on RCN9047-26. The test leads are mating Omnetics Micro 360 Cat6a connectors terminated with shielded microwave coax cables for each primary, and SMA connectors to interface with the test equipment.




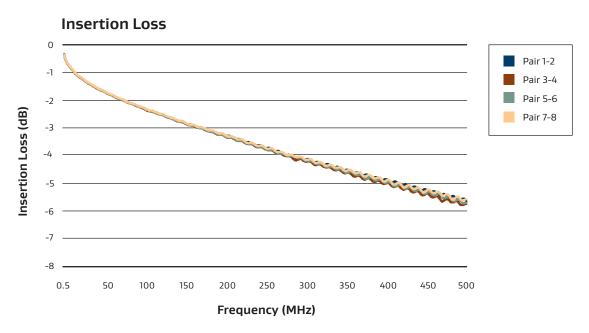

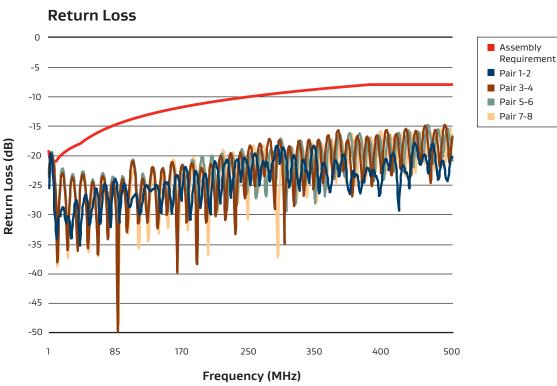

Near-End Crosstalk -25 -50 -75 -100 -125

Frequency (MHz)



NOTICE — USE RESTRICTIONS APPLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations. GORE, *Together, improving life*, and designs are trademarks of W. L. Gore & Associates. © 2022 W. L. Gore & Associates, Inc.